

CONTROL I

ELEN3016

Classical Design in the Frequency Domain

(Lecture 14)

Overview

- First Things First!
- Frequency Response Revised
- Graphical Interpretation of Frequency Response
- Tutorial Exercises & Homework
- **Next Attraction!**


First Things First!

- Important Matters

- Semester Test – Monday, 10th September 2012
 - Time: 8:00 – 10:00
 - Venue: CB228
 - Will cover Chapters 1-5
 - Closed-book test
 - One double-sided formula sheet with formulas but no diagrams!
- ... How is the Lab progressing? 😊

Frequency Response

- Generalised Frequency Response

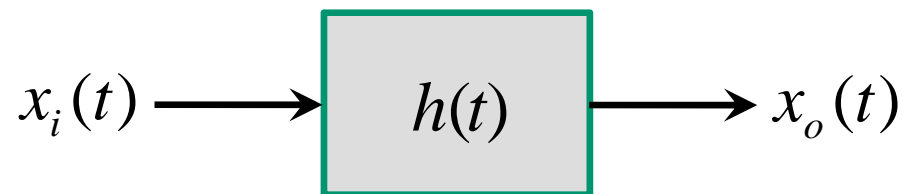


For $x_i(t) = e^{st}$ the forced response¹ is $x_o(t) = H_1(s) x_i(t)$ where $H_1(s) = \mathcal{L}(h(t))$ is called the *generalised frequency response* and $s = \sigma + j\omega$ is called the *generalised frequency*.

The Laplace transform yields generalised frequency response.

¹ BP Lathi, *Signals, Systems & Controls*, 1974, Sec. 2.16, Sec. 3.3 & Sec. 3.11.

Frequency Response

- Frequency Response

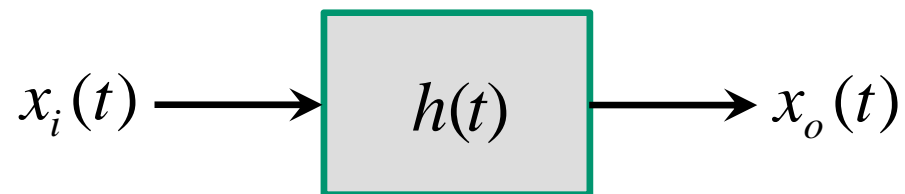

For $x_i(t) = e^{j\omega t}$ the forced response is $x_o(t) = H_2(\omega) x_i(t)$ where $H_2(\omega) = \mathcal{F}(h(t))$ is called the *frequency response* and ω is called the (radial) *frequency*.

The Fourier transform yields the frequency response.

Frequency Response

- Connection between GFR and FR?

$$H_2(\omega) = H_1(s) \Big|_{s=j\omega} = H_1(j\omega)$$

The Fourier transform is the Laplace transform evaluated along the $j\omega$ axis in the s -plane.

We shall now discard the subscripts "1" and "2".

Frequency Response

- Graphical Interpretation

$$G(j\omega)H(j\omega) \equiv |G(j\omega)H(j\omega)| \angle G(j\omega)H(j\omega)$$

$$= \frac{(j\omega - z_1) \times \cdots \times (j\omega - z_m)}{(j\omega - p_1) \times \cdots \times (j\omega - p_n)}$$

$$|G(j\omega)H(j\omega)| = \frac{|j\omega - z_1| \times \cdots \times |j\omega - z_m|}{|j\omega - p_1| \times \cdots \times |j\omega - p_n|}$$

$$\angle G(j\omega)H(j\omega) = \sum_{i=1}^m \angle(j\omega - z_i) - \sum_{i=1}^n \angle(j\omega - p_i)$$

Frequency Response


- Graphical Interpretation

Consider the system with loop transfer function

$$GH(s) \equiv G(s)H(s)$$



$$= \frac{(s+1)}{(s+2.5-j2.3)(s+2.5+j2.3)}$$

$$|GH(j\omega)| = \frac{|j\omega+1|}{|j\omega+2.5-j2.3||j\omega+2.5+j2.3|}$$

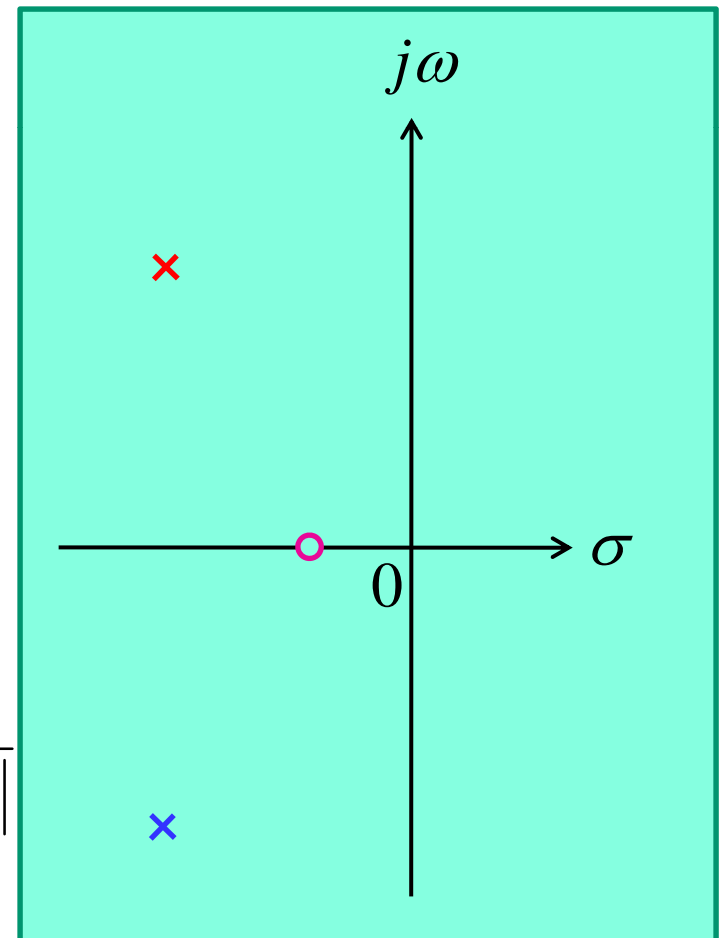



Frequency Response

- Graphical Interpretation

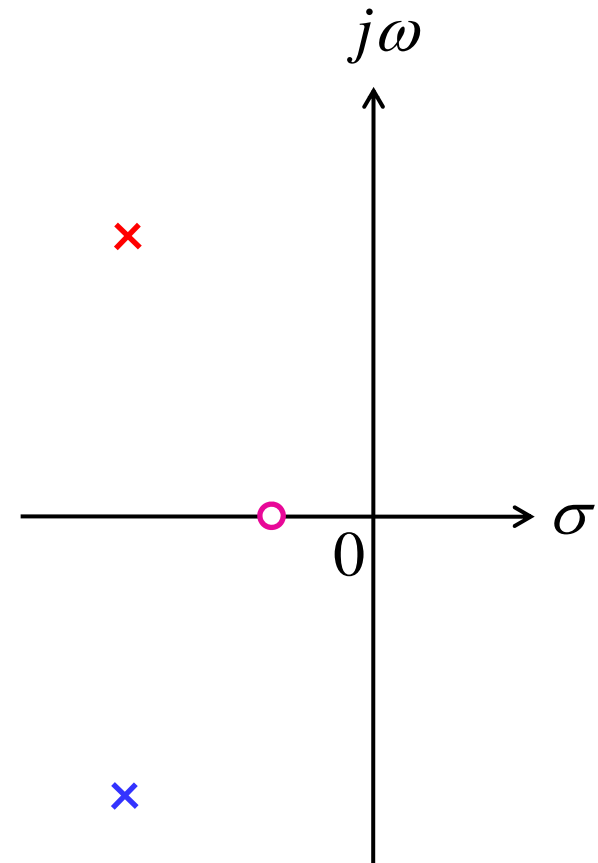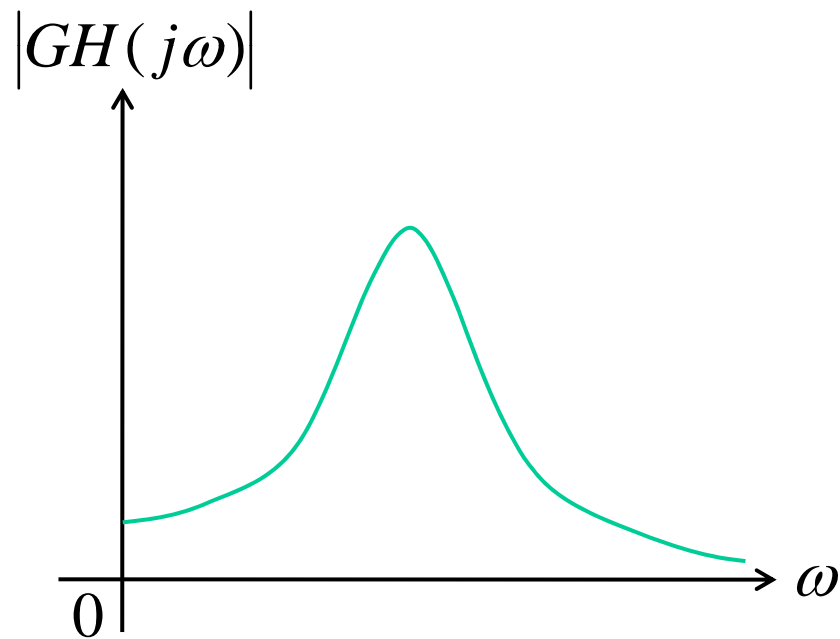



Frequency Response

- Graphical Interpretation

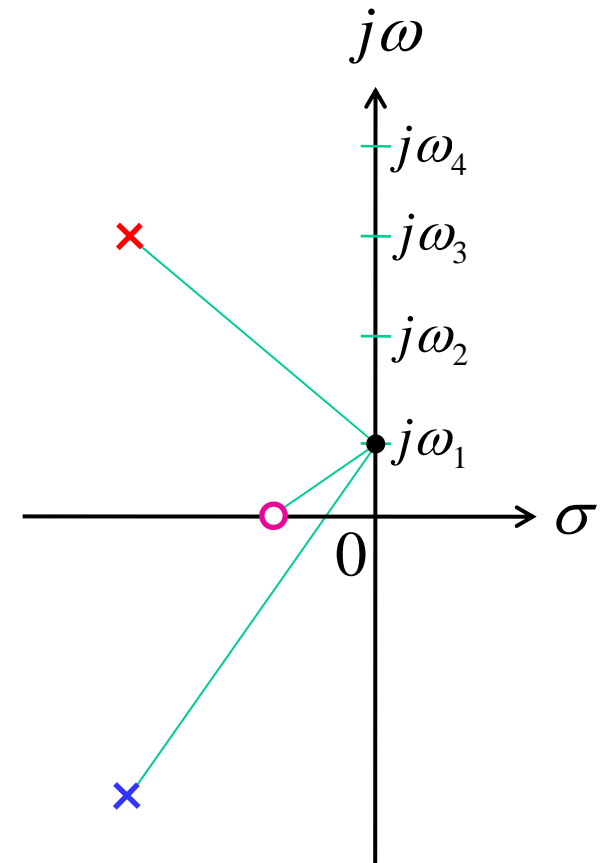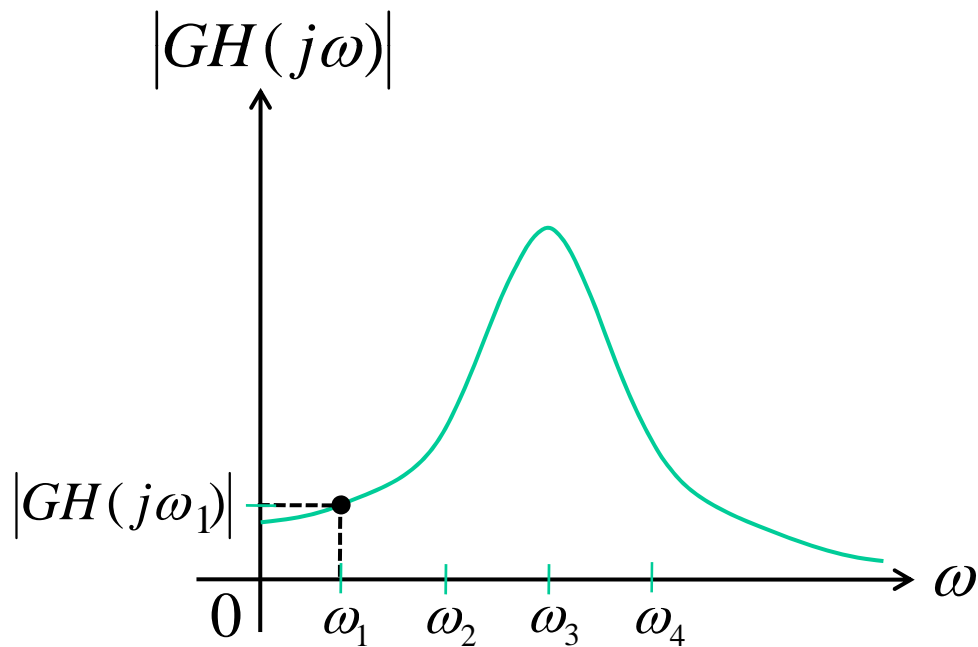



Frequency Response

- Graphical Interpretation

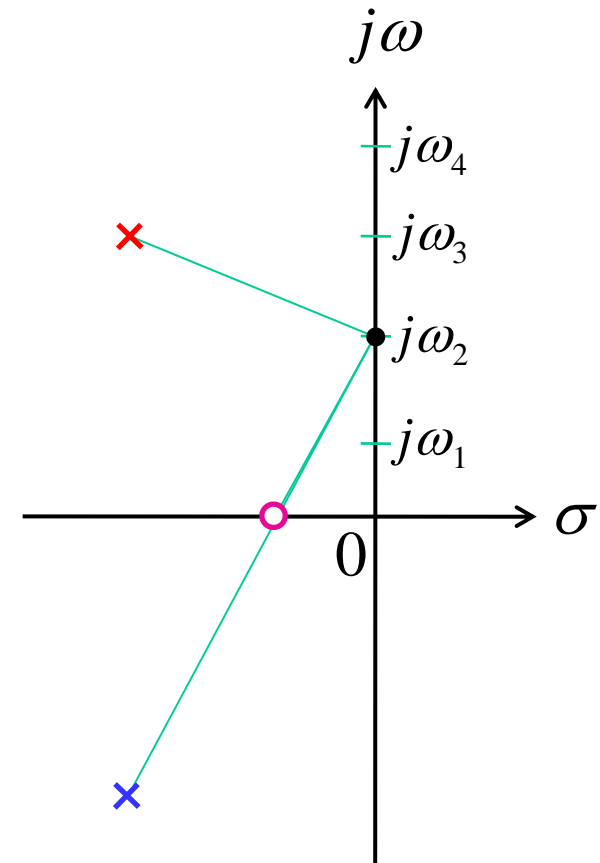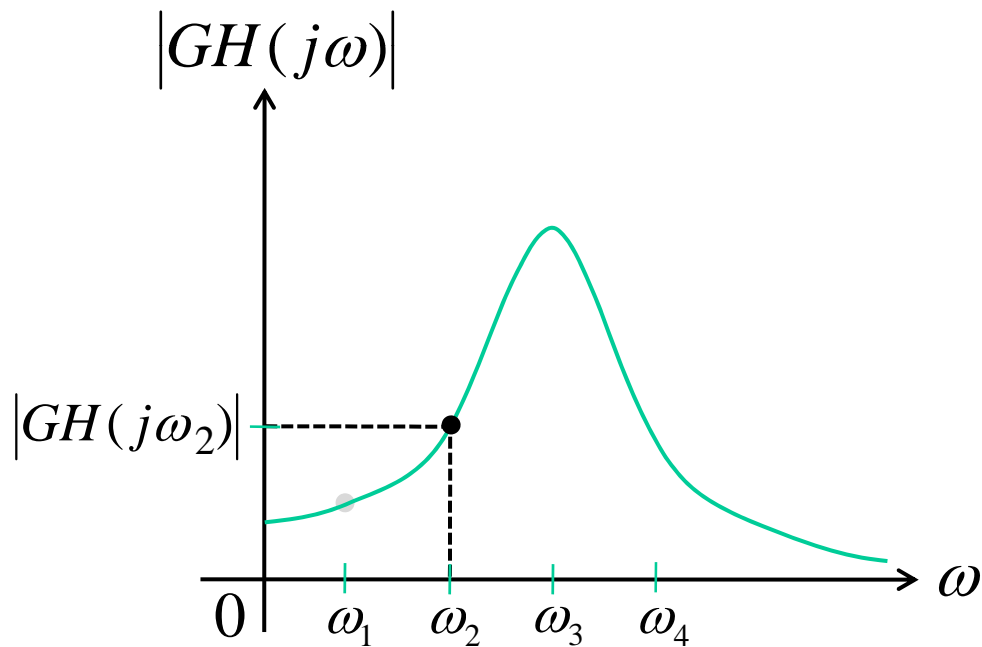



Frequency Response

- Graphical Interpretation

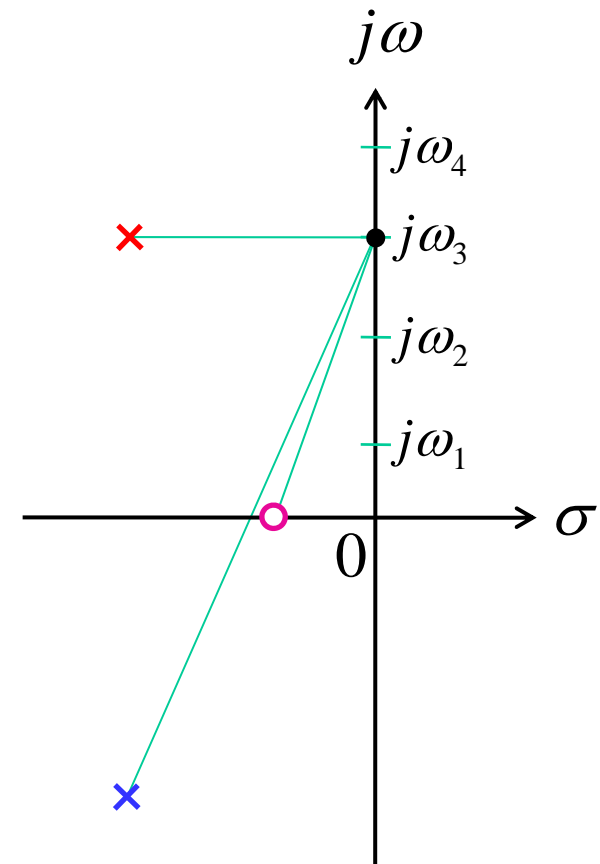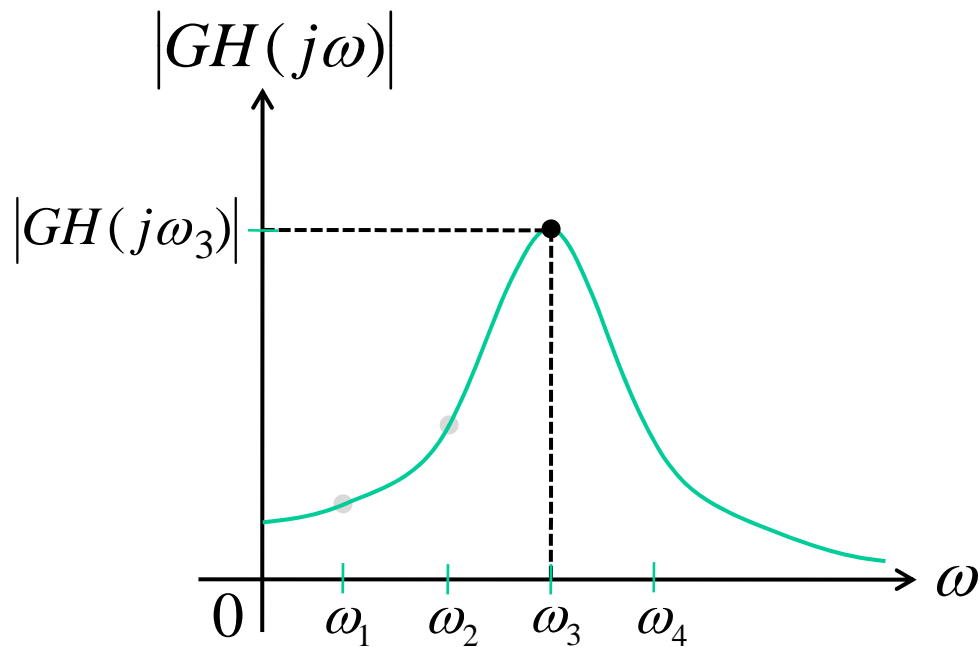


Frequency Response

- Graphical Interpretation

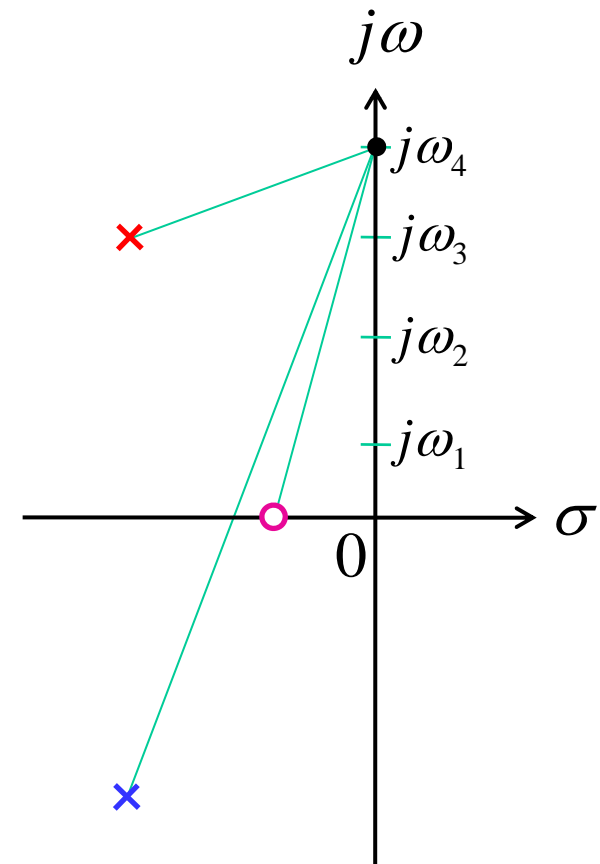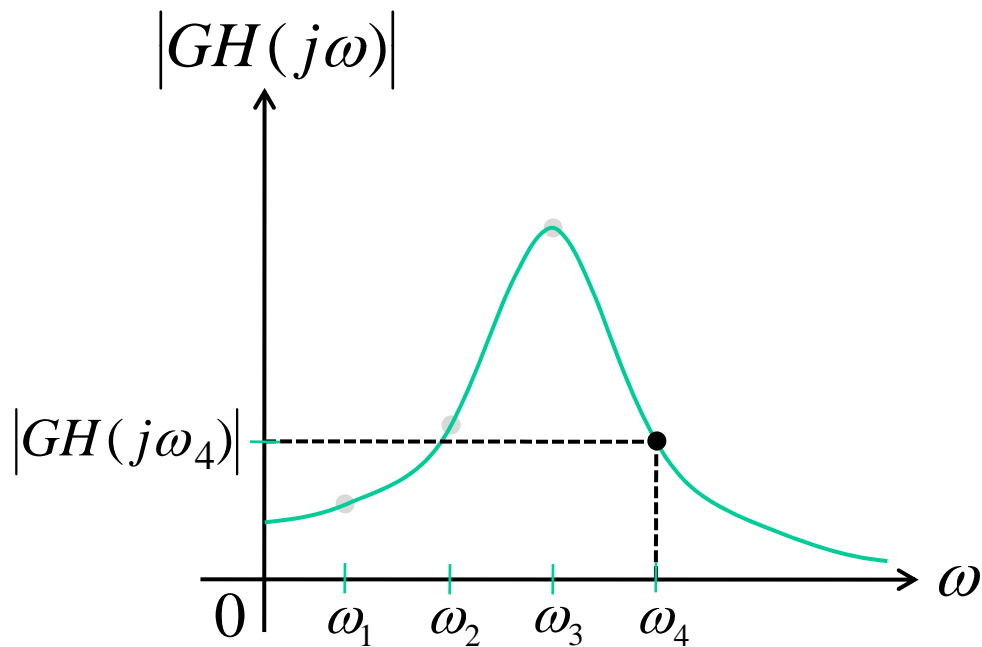

Frequency Response

- Graphical Interpretation

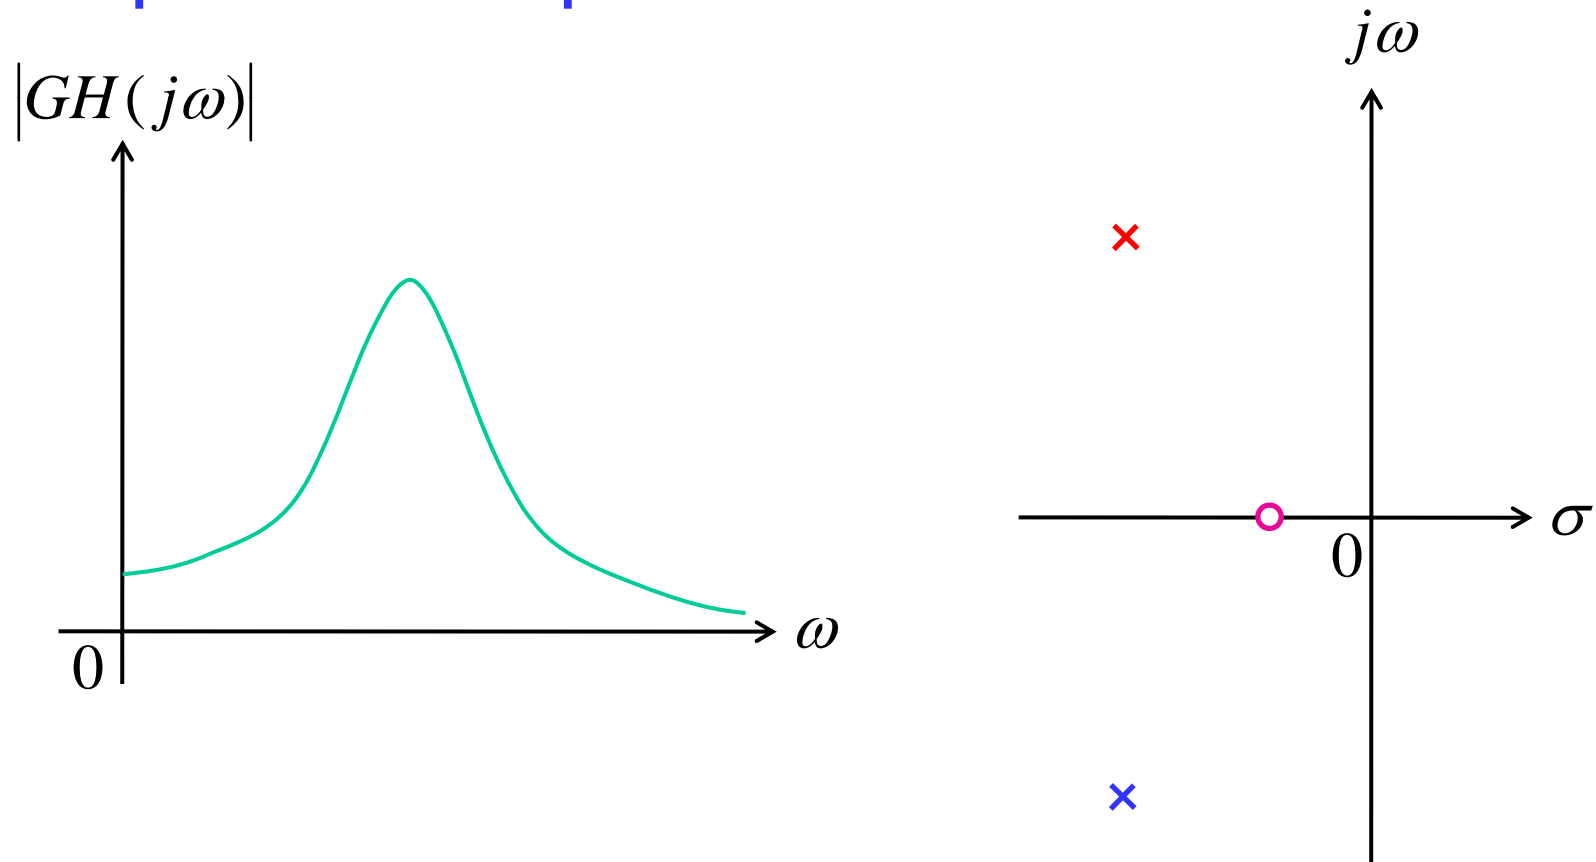

Tutorial Exercises & Homework

- Tutorial Exercises

- Burns, Examples 6.10

- Sketch the frequency response of $G(s) = \frac{1}{s+1}$.

- Homework

- Study all relevant sections in Burns.


Conclusion

- Frequency Response
- Graphical Interpretation
- Burns, pp. 145-161 (**Self-study!**)
- Tutorial & Homework Exercises

Next Attraction! – Miss It & You'll Miss Out!

- Classical Design in the Frequency Domain Continued (Burns, Chapter 6)

...



Thank you!
Any Questions?