



CONTROL I

ELEN3016

Digital Controller Design

(Lecture 24)

Overview


- First Things First!
- Digital Controller Design
(Classical Methods, Numerical Methods, Analytical Design, Optimum Response Digital Design)
- Tutorial Exercises & Homework

First Things First!

- Course Review Meeting – date & time?


Digital Controller Design

- Computer-Controlled System

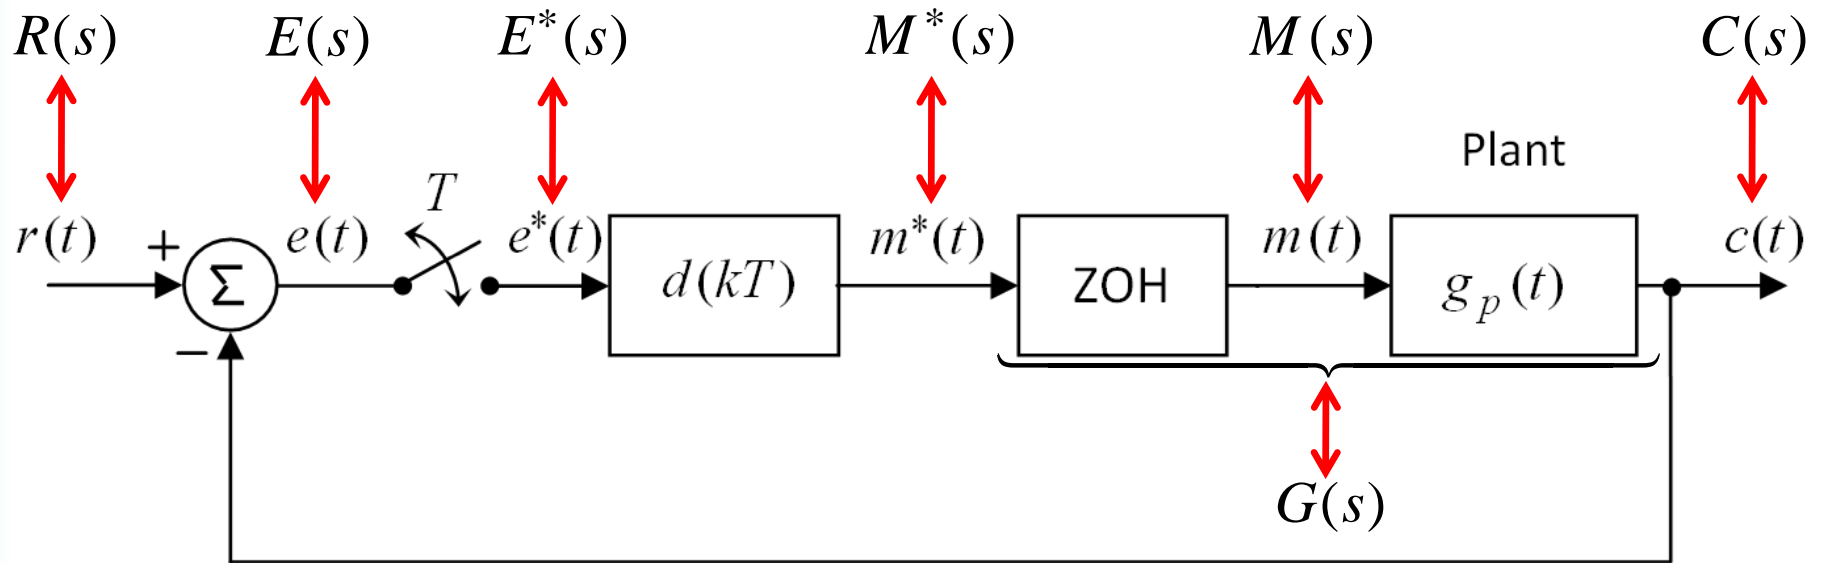

Digital Controller Design

- Computer-Controlled System

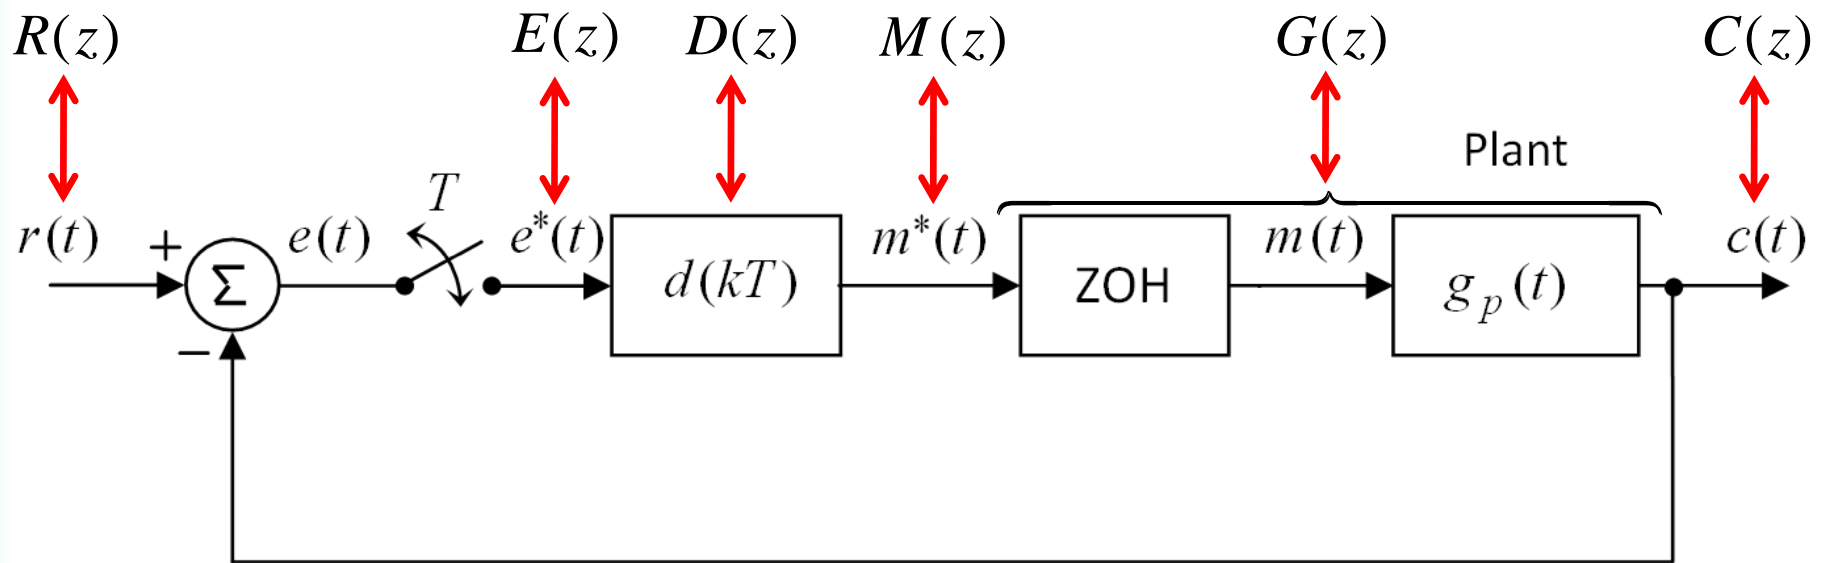

Digital Controller Design

- Computer-Controlled System cont'd

- Z transform of the digital controller is

$$M(z) = D(z) E(z)$$

- Z transform of the output is

$$C(z) = G(z) \overbrace{D(z) E(z)}^{M(z)} = G(z) D(z) \overbrace{(R(z) - C(z))}^{E(z)}$$

giving

$$C(z) = \frac{D(z)G(z)}{1 + D(z)G(z)} R(z)$$

Digital Controller Design

- Digital Controller Design via Classical Methods
 - Transform $G(z)$ to an equivalent s -plane called the w -plane using the bilinear transformation $z = (w-1)/(w+1)$.
 - Apply any classical design procedure.
 - Transform back to the z -plane using the inverse transformation $w = (1+z)/(1-z)$.

Digital Controller Design

- Digital Controller Design via Numerical Methods
 - Transform ordinary differential equations to equivalent difference equations using various approximations for integrals and derivatives studied in numerical methods.
 - Particularly useful for deriving discrete equivalent PID controllers from the standard continuous time PID controller.

Digital Controller Design

- Analytical Design
 - Expresses the controller pulse transfer function $D(z)$ in terms of the ZOH & plant pulse transfer function $G(z)$ and desired closed-loop pulse transfer function $C(z)/R(z)$

Digital Controller Design

- Analytical Design cont'd

- Recall from an earlier slide that

$$C(z) = G(z)D(z)\overbrace{(R(z) - C(z))}^{E(z)}$$

- From this the expression for $D(z)$ is

$$D(z) = \frac{C(z)}{G(z)(R(z) - C(z))} = \frac{1}{G(z)} \frac{C(z)/R(z)}{(1 - C(z)/R(z))}$$

Digital Controller Design

- Analytical Design cont'd

- Recall from an earlier slide that

$$C(z) = G(z)D(z)\overbrace{(R(z) - C(z))}^{E(z)}$$

- From this the expression for $D(z)$ is

$$D(z) = \frac{C(z)}{G(z)(R(z) - C(z))} = \frac{1}{G(z)} \frac{C(z)/R(z)}{(1 - C(z)/R(z))}$$

Analytical Design

- **Example** (Raven)

- Plant, $G_p(s) = \frac{(s+2)}{s(s+1)}$.

- Specifications:

- Sampling period: $T = 1.0$ s

- Desired response required: $c(t) = 5(1 - e^{-2t})$

Analytical Design

- Example cont'd

- ZOH–Plant combination

$$G(s) = \underbrace{\left(1 - e^{-sT}\right)}_{G_1(s)} \underbrace{\frac{(s+2)}{s^2(s+1)}}_{G_2(s)} \quad (T = 1)$$

- Discrete part of ZOH

$$G_1(s) = 1 - e^{-s}$$

$$G_1(z) = \mathcal{Z}\left[1 - e^{-s}\right] = 1 - z^{-1} = \frac{z-1}{z}$$

Analytical Design

- Example cont'd

- Plant and continuous part of ZOH

$$G_2(s) = \frac{(s+2)}{s^2(s+1)} = \frac{2}{s^2} - \frac{1}{s} + \frac{1}{s+1}$$

$$G_2(z) = \mathcal{Z} \left[\frac{2}{s^2} - \frac{1}{s} + \frac{1}{s+1} \right] = \frac{2z}{(z-1)^2} - \frac{z}{z-1} + \frac{z}{z-0.368}$$

- ZOH & plant combination pulse transfer function

$$G(z) = G_1(z)G_2(z) = \frac{1.368z - 0.104}{z^2 - 1.368z + 0.368}$$

Analytical Design

- Example cont'd

- The Laplace transform of the desired response is

$$C(s) = 5 \left(\frac{1}{s} - \frac{1}{s+2} \right)$$

and

$$C(z) = 5 \mathcal{Z} \left[\frac{1}{s} - \frac{1}{s+2} \right] = 5 \left[\frac{z}{z-1} + \frac{z}{z-0.135} \right] = \frac{4.32z}{(z-1)(z-0.135)}$$

- From this we derive the ratios

$$\frac{C(z)}{R(z)} = \frac{4.32}{z-0.135} \quad \text{and} \quad 1 - \frac{C(z)}{R(z)} = \frac{z-4.45}{z-0.135}$$

Analytical Design

- Example cont'd

- Substituting the above expressions into the formula for $D(z)$ yields

$$\begin{aligned} D(z) &= \frac{z^2 - 1.368z + 0.368}{1.368z - 0.104} \frac{4.32}{z - 0.135} \\ &= \frac{4.32z^2 - 5.91z + 1.59}{1.368z^2 - 6.202z + 0.46} \\ &= \frac{3.16 - 4.32z^{-1} + 1.16z^{-2}}{1 - 4.53z^{-1} + 0.34z^{-2}} = \frac{M(z)}{E(z)} \end{aligned}$$

Analytical Design

- Example cont'd

- Cross multiplication gives

$$\left(1 - 4.53z^{-1} + 0.34z^{-2}\right)M(z) = \left(3.16 - 4.32z^{-1} + 1.16z^{-2}\right)E(z)$$

- The time domain equation for the controller is


$$m(k) = 3.16e(k) - 4.32e(k-1) + 1.16e(k-2) + 4.53m(k-1) - 0.34m(k-2)$$

Digital Controller Design

- Optimum Response Design
 - *Optimum*: The closed-loop system responds to a step input in the minimum time with no overshoot and no steady-state error.
 - For a system of order N the step response settles to the desired final value after $N+1$ sample instants.
 - Proposed by R.E. Kalman in the 1954.


2nd Order Optimum Response

First sampling period excitation

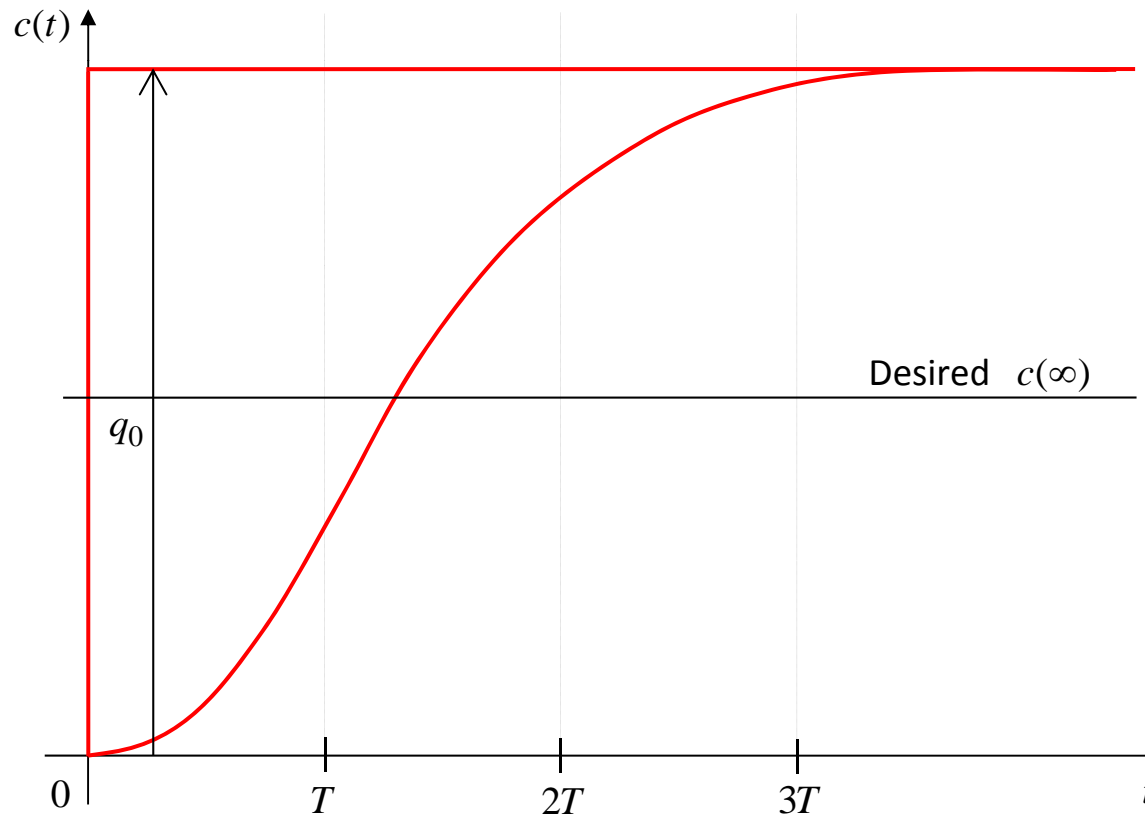


2nd Order Optimum Response

Second sampling period excitation

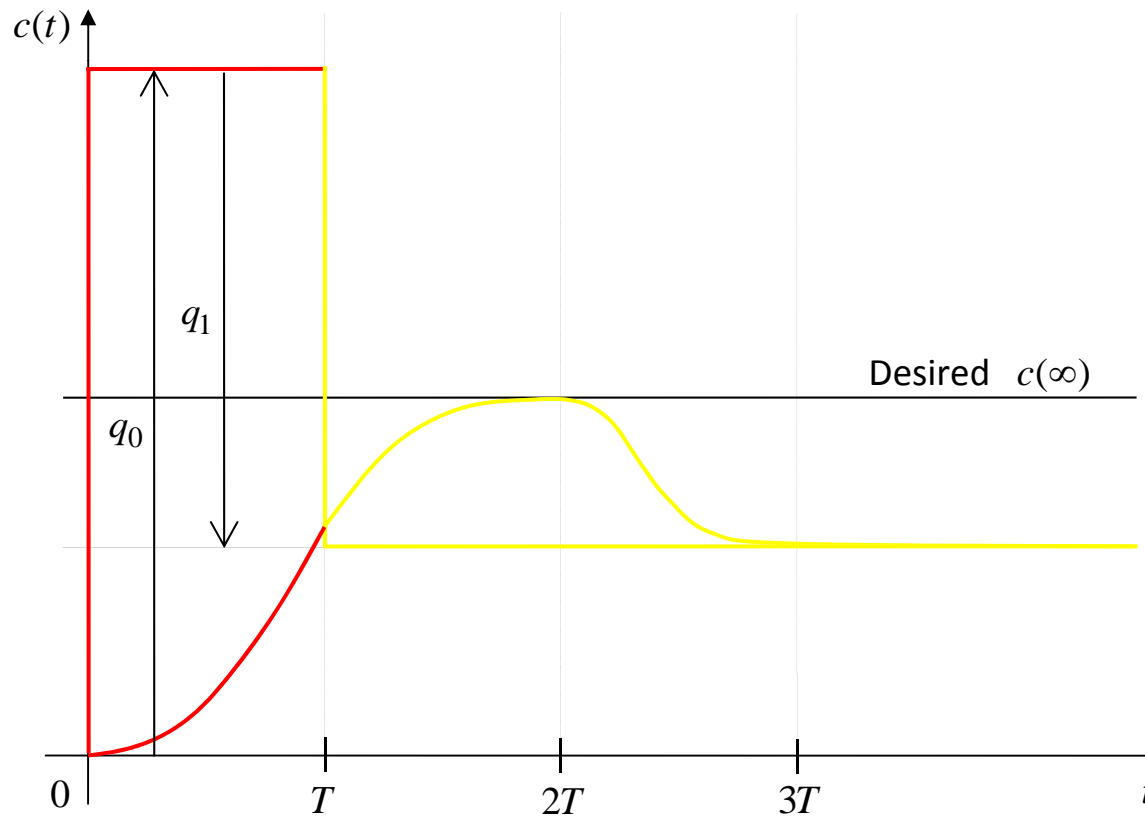


2nd Order Optimum Response

Third sampling period excitation

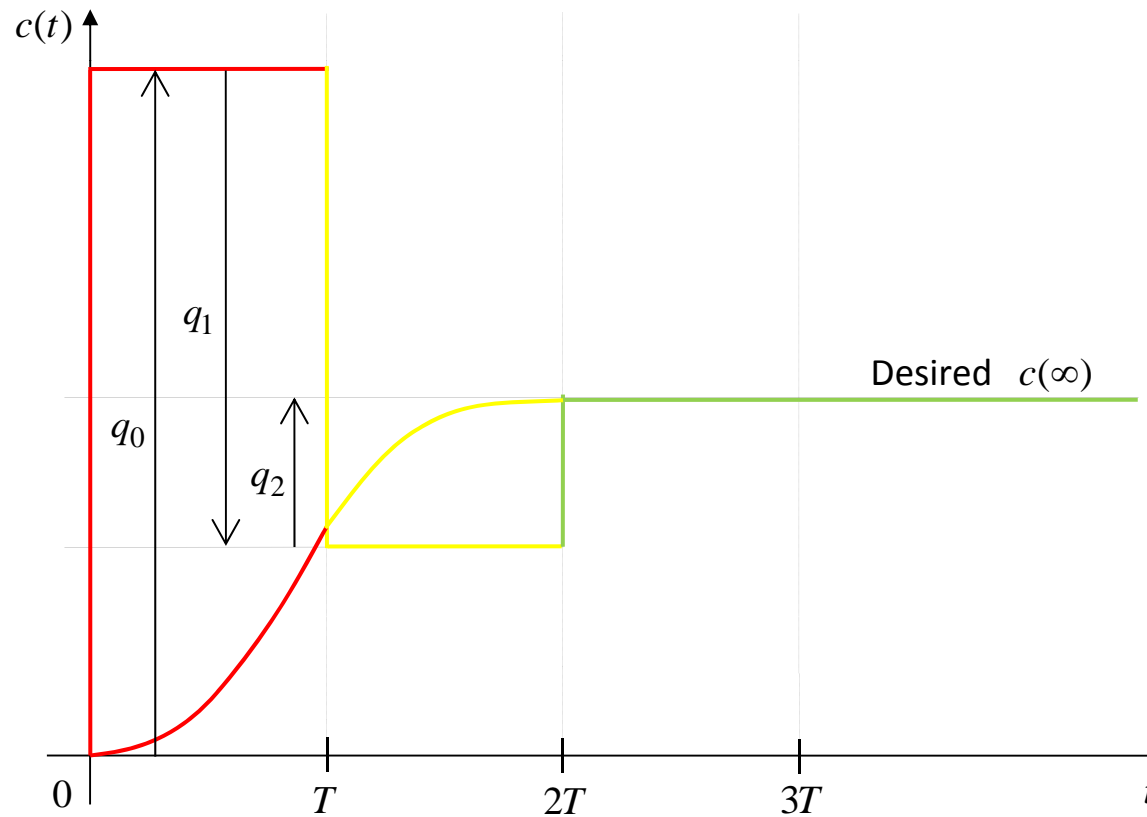


2nd Order Optimum Response

Complete plant excitation & output response

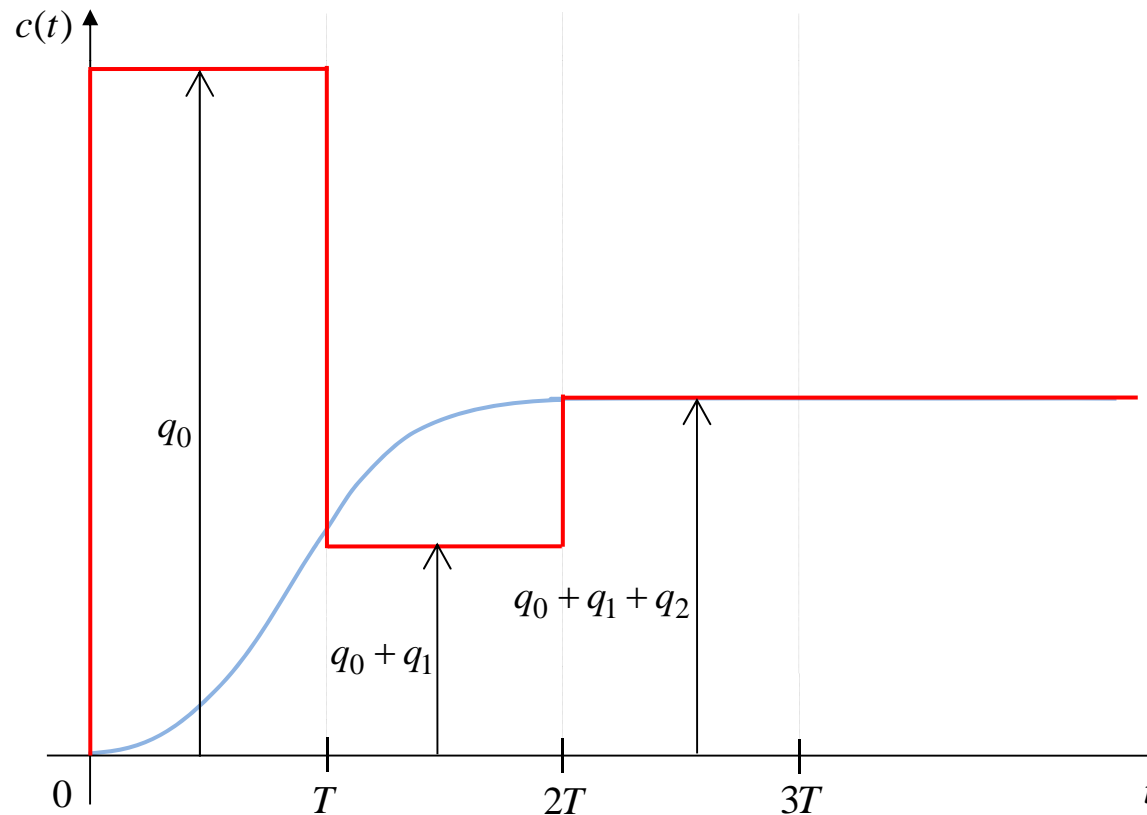

2nd Order Optimum Response

Complete plant excitation & output response

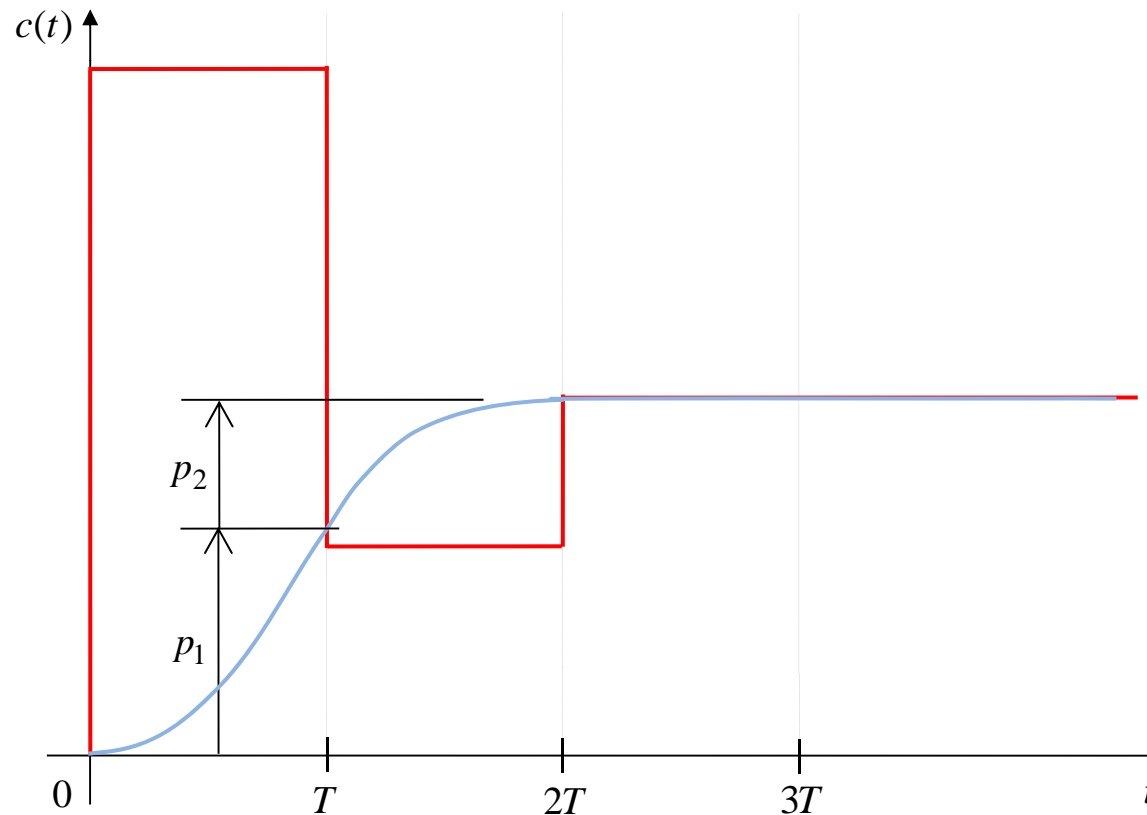

2nd Order Optimum Response

- **Derivation** (Raven)

- For unit step input

$$R(z) = 1 + z^{-1} + z^{-2} + z^{-3} + \dots$$

- The ZOH's output is

$$M(z) = q_0 + (q_0 + q_1)z^{-1} + (q_0 + q_1 + q_2)(z^{-2} + z^{-3} + \dots)$$

- Long division yields

$$\frac{M(z)}{R(z)} = \dots = q_0 + q_1z^{-1} + q_2z^{-2}$$

2nd Order Optimum Response

- Derivation cont'd

- The plant's output is

$$C(z) = p_1 z^{-1} + (p_1 + p_2)(z^{-2} + z^{-3} + z^{-4} + \dots)$$

- Long division yields

$$\frac{C(z)}{R(z)} = \dots = p_1 z^{-1} + p_2 z^{-2}$$

- Pulse transfer function of the ZOH and plant combination is

$$G(z) = \frac{C(z)}{M(z)} = \frac{C(z)/R(z)}{M(z)/R(z)} = \frac{p_1 z^{-1} + p_2 z^{-2}}{q_0 + q_1 z^{-1} + q_2 z^{-2}}$$

2nd Order Optimum Response

- Derivation cont'd

- The plant's output is

$$C(z) = p_1 z^{-1} + (p_1 + p_2)(z^{-2} + z^{-3} + z^{-4} + \dots)$$

- Pulse transfer function of the digital controller is

$$D(z) = \frac{M(z)}{E(z)} = \frac{M(z)}{R(z) - C(z)} = \frac{M(z)/R(z)}{1 - C(z)/R(z)} = \frac{q_0 + q_1 z^{-1} + q_2 z^{-2}}{1 - p_1 z^{-1} - p_2 z^{-2}}$$

- The inverse Z-transform gives

$$m(k) = q_0 e(k) + q_1 e(k-1) + q_2 e(k-2) + \\ + p_1 m(k-1) + p_2 m(k-2)$$

2nd Order Optimum Response

- Derivation cont'd

- The FVT yields the steady-state of the plant output as

$$c(\infty) = \lim_{z \rightarrow 1} \frac{z-1}{z} C(z) = \dots = p_1 + p_2$$

- The steady-state of $m(t)$ is

$$m(\infty) = \lim_{z \rightarrow 1} \frac{z-1}{z} M(z) = \dots = q_0 + q_1 + q_2$$

- The closed-loop system steady-state gain is

$$K = \frac{c(\infty)}{r(\infty)} = p_1 + p_2$$

2nd Order Optimum Response

- Derivation cont'd

- The plant steady-state gain is

$$K_p = \frac{c(\infty)}{m(\infty)} = \frac{p_1 + p_2}{q_0 + q_1 + q_2}$$

- For a 2nd order plant the closed-loop pulse transfer function has the form

$$G(z) = \frac{a_1 z^{-1} + a_2 z^{-2}}{b_0 + b_1 z^{-1} + b_2 z^{-2}}$$

- From this we obtain

$$K = p_1 + p_2 = k(a_1 + a_2) \quad k = \frac{K}{a_1 + a_2}$$

2nd Order Optimum Response

- Interpretation

- Considering the product of $D(z)$ and $G(z)$ namely

$$\begin{aligned} D(z)G(z) &= \frac{q_0 + q_1z^{-1} + q_2z^{-2}}{1 - p_1z^{-1} - p_2z^{-2}} \frac{p_1z^{-1} + p_2z^{-2}}{q_0 + q_1z^{-1} + q_2z^{-2}} \\ &= \frac{p_1z^{-1} + p_2z^{-2}}{1 - p_1z^{-1} - p_2z^{-2}} \end{aligned}$$

shows that the controller zeros cancel the ZOH & plant poles and that both poles and zeros of the compensated open-loop system $D(z)G(z)$ depend on p_1 and p_2 exclusively.

2nd Order Optimum Response

- Interpretation cont'd

- The closed-loop compensated system now has as pulse transfer function

$$\frac{C(z)}{R(z)} = \frac{D(z)G(z)}{1 + D(z)G(z)} = \dots = p_1z^{-1} + p_2z^{-2}$$

and clearly is of finite impulse response (FIR) type even though the compensated open-loop system is of infinite impulse response (IIR) type.

- This FIR structure explains why the closed-loop compensated system's step response settles in a finite number of samples.

2nd Order Optimum Response

- Interpretation cont'd
 - When the sampling period T is sufficiently shorter than the fastest time constant of the closed-loop compensated system the step response of the closed-loop compensated system is guaranteed to be settled for $t \geq 2T$.

2nd Order Optimum Response

- **Example** (Raven)

- Plant, $G_p(s) = \frac{(s+2)}{s(s+1)}$.

- Specifications:

- Sampling period: $T = 1.0\text{s}$

- Optimum response required.

- Closed-loop steady-state gain: $K = 5$

2nd Order Optimum Response

- Example cont'd

- ZOH–Plant combination

$$G(s) = \underbrace{\left(1 - e^{-sT}\right)}_{G_1(s)} \underbrace{\frac{(s+2)}{s^2(s+1)}}_{G_2(s)}$$

- Discrete part of ZOH

$$G_1(s) = 1 - e^{-s} \quad (T = 1)$$

$$G_1(z) = Z\left[1 - e^{-s}\right] = 1 - z^{-1} = \frac{z-1}{z}$$

2nd Order Optimum Response

- Example cont'd

- Plant and continuous part of ZOH

$$G_2(s) = \frac{(s+2)}{s^2(s+1)} = \frac{2}{s^2} - \frac{1}{s} + \frac{1}{s+1}$$

$$G_2(z) = \mathcal{Z} \left[\frac{2}{s^2} - \frac{1}{s} + \frac{1}{s+1} \right] = \frac{2z}{(z-1)^2} - \frac{z}{z-1} + \frac{z}{z-0.368}$$

- ZOH & plant combination pulse transfer function

$$G(z) = G_1(z)G_2(z) = \frac{1.368z - 0.104}{z^2 - 1.368z + 0.368}$$

2nd Order Optimum Response

- Example cont'd

- From the numerator

$$a_1 + a_2 = 1.368 - 0.104 = 1.264$$

- Desired gain

$$K = p_1 + p_2 = 5 = (a_1 + a_2)k = 1.264k$$

$$k = \frac{5}{1.264} = 3.96$$

- For the required gain the plant becomes

$$G(s) = \frac{k(1.368z - 0.104)}{k(z^2 - 1.368z + 0.368)} = \frac{5.42 - 0.42z^{-1}}{3.96 - 5.42z^{-1} + 1.46z^{-2}}$$

2nd Order Optimum Response

- Example cont'd

- Equating

$$\frac{p_1 z^{-1} + p_2 z^{-2}}{q_0 + q_1 z^{-1} + q_2 z^{-2}} = \frac{5.42 - 0.42 z^{-1}}{3.96 - 5.42 z^{-1} + 1.46 z^{-2}}$$

and comparing coefficients yields

$$p_1 = 5.42, \quad p_2 = -0.42, \quad q_0 = 3.96, \quad q_1 = -5.42, \quad q_2 = 1.46.$$

- Verification:

$$p_1 + p_2 = 5.42 - 0.42 = 5.$$

2nd Order Optimum Response

- Example cont'd

- The time domain equation for the controller is

$$m(k) = 3.96e(k) - 5.42e(k-1) + 1.46e(k-2) + 5.42m(k-1) - 0.42m(k-2)$$

Tutorial Exercises & Homework

- Tutorial Exercises
 - To be announced at the beginning of the tut session.
- Homework
 - Study all relevant sections in Burns.

Conclusion

- Digital Controllers – Overview
- Analytical Design – Theory & Example
- Optimum Response Design – Theory & Example
- For general optimum response design refer to F.H. Raven “Automatic Control Engineering” 5th edition, pp 494–496 (Optional)
- Tutorial Exercises & Homework



**Thank you
for your interest!**